



Wheatland Tube Company

900 Haddon Avenue
Collingswood, NJ 08108-2162
800.257.8182

www.wheatland.com

20 Foot Lengths



Rigid Metal Conduit (RMC) Electrical Metallic Tubing (EMT)



Lifts of Traditional 10 foot Rigid Metal (RMC) and Electrical Metallic Tubing (EMT) stacked in front of lifts of 20 foot.

Conforms to the same standards as the traditional 10 foot lengths of Rigid Metal Conduit (RMC) and Electrical Metallic Tubing (EMT). All manufacturing facilities registered to ISO9001:2000.

Wheatland Rigid and EMT is made in the U.S.A.



20 Foot Electrical Metallic Tubing (EMT)

Applicable Specifications:

Underwriters Laboratories Inc. UL Standard for Safety for Electrical Metallic Tubing - Steel, UL 797
American National Standards Institute, Inc. C80.3

The Department of Defense and other federal agencies have adopted UL 797 in place of WW-C563



Made in the U.S.A.



File No.
E48675

Management Systems Registered to:
ISO 9001:2000

Certificate Numbers:
Wheatland, PA 007172
Chicago, IL 008952
Little Rock, AR 009081

Weights and Dimensions

Trade Size	Metric Designator	Weight 5 Unit Lengths		Outside Diameter(1)		Inside Diameter(2)		Wall Thickness(2)	
		lb	kg	in.	mm	in.	mm	in.	mm
1/2	16	30	13.6	0.706	17.93	0.622	15.80	.042	1.07
3/4	21	46	20.9	0.922	23.42	0.824	20.93	.049	1.25
1	27	67	30.4	1.163	29.54	1.049	26.64	.057	1.45
1 1/4	35	101	45.8	1.510	38.35	1.380	35.05	.065	1.65
1 1/2	41	116	52.6	1.740	44.20	1.610	40.89	.065	1.65
2	53	148	67.1	2.197	55.80	2.067	52.50	.065	1.65
2 1/2	63	216	98.0	2.875	73.03	2.731	69.37	.072	1.83
3	78	263	119.3	3.500	88.90	3.356	85.24	.072	1.83
3 1/2	91	349	158.3	4.000	101.60	3.834	97.38	.083	2.11
4	103	393	178.3	4.500	114.30	4.334	110.08	.083	2.11

Packaging

NOTES: ¹ Outside diameter subject to UL 797 tolerances.
² For information only, not a UL 797 requirement.

Trade Size	Metric Designator	Quantity Per Lift			Weight Per Lift		Volume Per Lift	
		Pieces	Feet	Meters	Pounds	Kilograms	Cu. Ft.	Cu. m
1/2	16	175	3500	1066.8	1050	476.3	12.1	0.34
3/4	21	125	2500	762.0	1150	521.6	14.8	0.42
1	27	75	1500	457.2	1005	455.9	14.1	0.40
1 1/4	35	50	1000	304.8	1010	458.1	15.8	0.45
1 1/2	41	37	740	225.6	858	389.4	15.6	0.44
2	53	37	740	225.6	1095	496.8	24.8	0.70
2 1/2	63	19	380	115.8	821	372.3	21.8	0.62
3	78	19	380	115.8	999	453.3	32.3	0.92
3 1/2	91	19	380	115.8	1326	601.6	42.2	1.20
4	103	10	200	61.0	786	356.5	28.1	0.80

Note: The length is nominal and subject to the tolerance of UL Standard for Safety for Electrical Metallic Tubing - Steel, UL 797



20 Foot Steel Rigid Metal Conduit (RMC) Hot-Dip Galvanized


Applicable Specifications:

Underwriters Laboratories Inc. UL Standard for Safety for Electrical Rigid Metal Conduit - Steel, UL 6
American National Standards Institute, Inc. C80.1

The Department of Defense and other federal agencies have adopted UL 6 in place of WW-C581



Made in the
U.S.A.

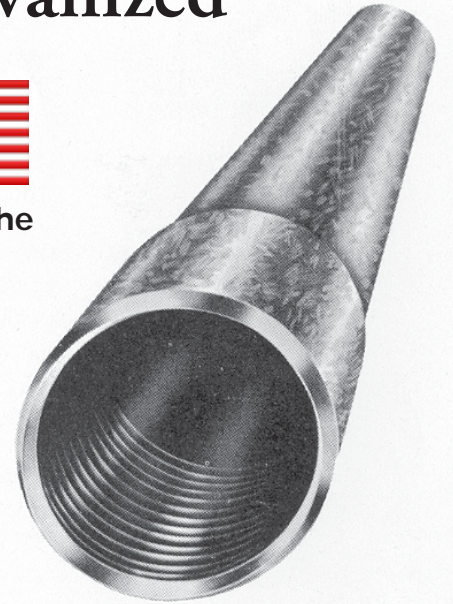

File No.
E32152

Management Systems Registered to:
ISO 9001:2000

Certificate Numbers:
Wheatland, PA 007172
Chicago, IL 008952
Little Rock, AR 009081

Note: Consult factory for minimum order quantity of trade sizes other than 2, 3 and 4 RSC.

Weights and Dimensions

Trade Size	Metric Designator	Weight 5 Unit Lengths		Outside Diameter*		Inside Diameter*		Wall Thickness*	
		lb	kg	in.	mm	in.	mm	in.	mm
2	53	350	158.76	2.375	60.33	2.083	52.91	.146	3.71
2½	63	559	253.56	2.875	73.03	2.489	63.22	.193	4.90
3	78	727	329.77	3.500	88.90	3.090	78.49	.205	5.21
3½	91	880	399.17	4.000	101.60	3.570	90.68	.215	5.46
4	103	1030	467.21	4.500	114.30	4.050	102.87	.225	5.72
5	129	1400	635.04	5.563	141.30	5.073	128.85	.245	6.22
6	155	1840	834.62	6.625	168.28	6.093	154.76	.266	6.76

* For information only, not a UL 6 requirement

Packaging

Trade Size	Metric Designator	Thread Protector Color	Quantity Per Lift			Weight Per Lift		Volume Per Lift	
			Pieces	Feet	Meters	Pounds	Kilograms	Cu. Ft.	Cu. m
2	53	Blue	30	600	183	2100	952.6	36.1	1.0
2½	63	Black	18	360	110	2012	912.6	35.0	1.0
3	78	Blue	15	300	91	2181	989.3	41.5	1.2
3½	91	Black	12	240	73	2112	958.0	43.3	1.2
4	103	Blue	10	200	61	2060	934.4	48.6	1.4
5	129	Blue	7	140	43	1960	889.1	52.1	1.5
6	155	Blue	5	100	30	1840	834.6	43.8	1.2

Note: The length is nominal and subject to the tolerance of UL Standard for Safety for Electrical Rigid Metal Conduit - Steel, UL 6



20 Foot Rigid Conduit and EMT

General

Wheatland is now offering 20 foot* lengths of Electrical Metallic Tubing (EMT) in Trade Sizes 1/2 through 4, and Rigid Metal Conduit (RMC) in Trade Sizes 2 through 6, to reduce the number of joints and associated labor in assembling steel raceways. The 20 foot length product conforms to the same manufacturing standards and listing as the 10 foot lengths. All the properties of Wheatland's 10 foot Electrical Metallic Tubing (EMT) and Rigid Metal Conduit (RMC) with the added benefit of being double the length.

The pieces per lift have been adjusted to provide for secure packaging and ease in handling. Consult the packaging table, in this brochure, of the specific product and size for the actual quantity per lift.

Management Systems Registered to:

ISO 9001:2000

Certificate Numbers:

Wheatland, PA 007172

Chicago, IL 008952

Little Rock, AR 009081



20 Foot*
Galvanized Rigid
Steel Conduit,
TRADE SIZES
2, 3 & 4
IN STOCK

* The length is nominal and subject to the tolerance of UL Standard for Safety for Electrical Metallic Tubing - Steel, UL 797 or Standard for Safety for Electrical Rigid Metal Conduit - Steel, UL 6



20 Foot*
lengths of all
TRADE SIZES
of EMT
are now
IN STOCK

Contacts

Local

Contact your local sales representative for information. Our agent locator can be found on our website at www.wheatland.com/agtloce.htm

Manufacturer

Electrical Division Sales Department
Phone: 800-257-8182 Fax: 856-854-4973
E-mail: info@wheatland.com

Represented by:

